
# ATS1500A-IP-MM

**Advisor Advanced ATS1500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 32 zones, 4 areas, 1A PSU. Wired or wireless (hybrid) using plug-**

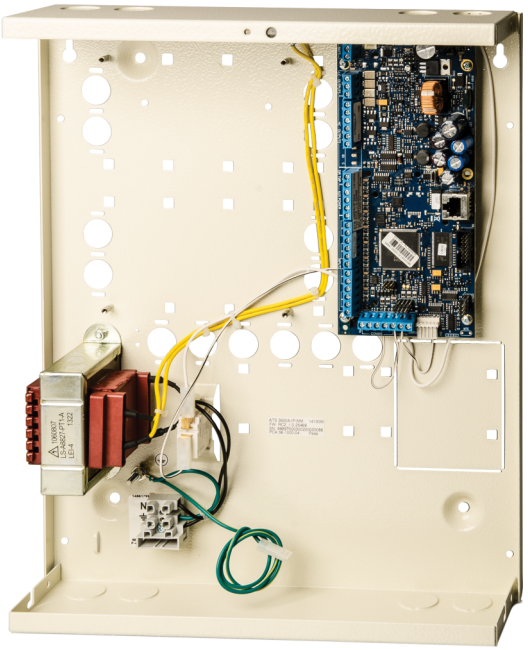

## Details

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Security grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: each user his own language
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP & DNS support
- Auto Arming - Schedules - Times Outputs

# ATS1500A-IP-MM

**Advisor Advanced ATS1500A-IP control panel in medium metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 32 zones, 4 areas, 1A PSU. Wired or wireless (hybrid) using plug-**

## Technische specificaties

### System

| | |
|---|---|
| Product line | Advisor Advanced |
| Product type | Integreret adgangskontrol |
| Panel type | Hybrid |
| Kit | No |
| No. of keypads / readers | 8 |
| Data Gathering Panels (DGP) | 7 |
| No. of alarm groups | 16 |
| Specified cable | WCAT52 / WCAT54 |

### Inputs

| | |
|---|---|
| Max no. of inputs | 32 |
| Onboard inputs | 8 |
| Inputs plug-in expansion | 8 |

### Outputs

| | |
|---|---|
| No. of outputs | 128 |
| No. of onboard outputs | 5 |

### Area

| | |
|---|---|
| No. of areas | 4 |

### User/Cards

| | |
|---|---|
| Max. no. of users | more than 2000 |
| Max. no. of cards | 50 |
| Max. no. of PIN codes | 50 |

### Communication

| | |
|---|---|
| Onboard transmission type | IP |
| Transmission extension | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type | RS485 |

### Electrical

| | |
|---|---|
| Power supply type | 230 VAC |
| Power supply value | 230 VAC +10%, -15%, 50 Hz |
| Mainboard current consumption | 150 mA |
| Max system current | 950 mA at 13.8 V ±0.2 V |
| Max aux power current | 840 mA |
| Auto-reset fuses | 5 |
| Glass break fuses | 1 |

### Physical

| | |
|---|---|
| Physical dimensions | 315 × 388 × 85 mm |
| Material | Stål (malet) |
| Housing | Mellemmetal |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +55°C |
| Relative humidity | 0.95 |
| Environmental Class | Class II, indoor |
| IP rating | 30 |

### Regulatory

| | |
|---|---|
| EN50131 Grade | Lønklasse 3, med sabotagesæt |
| Compliancy | CE |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57