VE735

PIR met 20m groothoekbereik en 60m longbeam. 9-15VDC. NC en REQ.



VE735

PIR met 20m groothoekbereik en 60m longbeam. 9-15VDC. NC en REQ.

Technische specificaties

General

Technology	PIR
Application type	Wandmontage
Anti masking	No
Pet immune	No
Camera	No
Signal processing	Vector Verified Enhanced (VE2)
Pry-off tamper kit	On board

Detection

Max. detection range	60 m
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 sek

Wired/wireless

Wired-wireless	Verdrahtet

Inputs/outputs

Relay configuration	Isoliert oder 4k7 EOL
Remote control lines	Tag/Nacht, Gehtest

Electrical

Power supply type	12 VDC

Physical


Colour	Weiß
Mounting height	1,8 bis 3 m

Environmental

Environment	Drinnen

Regulatory

EN50131 grade	Klasse 2
Certification	VdS

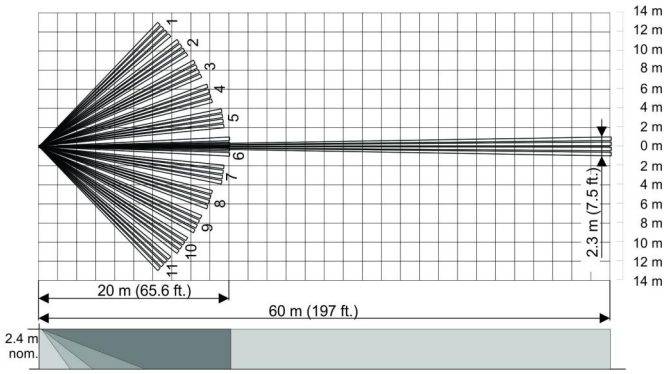

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57