NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports



NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports

Technische Spezifikationen

General

Fast ring	No
DHCP snooping	No
Fault relay output	No

Category

Category	Industrial
Management	Unmanaged
Managed	No
PoE	Yes

Physical ports

No. of ports	8
Port type	Fast
Speed	Fast
Fiber port	2 SFP
Supported SFPs	S30/S35 series

Switch Performance

Mac table	16 K
Jumbo frame support	10 K

Electrical

Redundant power	Yes
Power supply type	52 to 56 VDC

Physical

Colour	Black
Material	Metal
Mounting type	DIN-rail, Wall mount
Stackable	No

Environmental

Environment	Indoor

Regulatory

IEC standard	IEC60068-2-27 (shock), IEC60068-2-32 (free fall), IEC60068-2-6 (vibration)

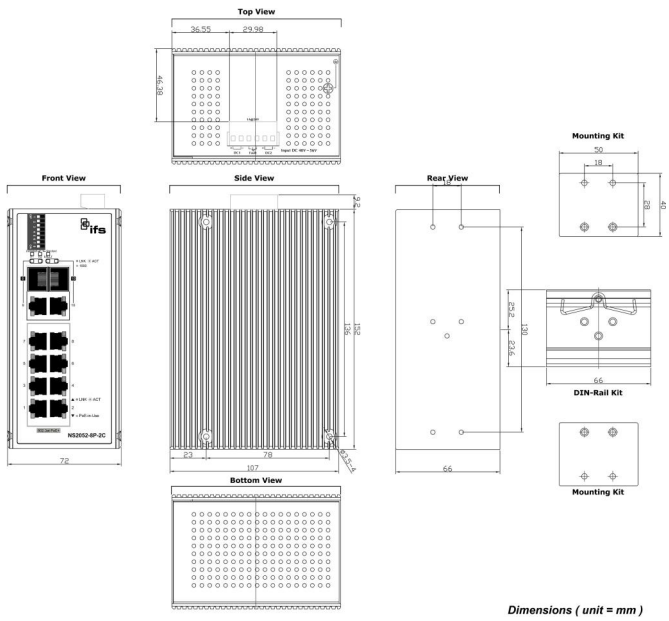

Dimensions (unit = mm)

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.