
ATS1482

ATS Reader Address Configuration Card for ATS1160/61 Mifare Readers

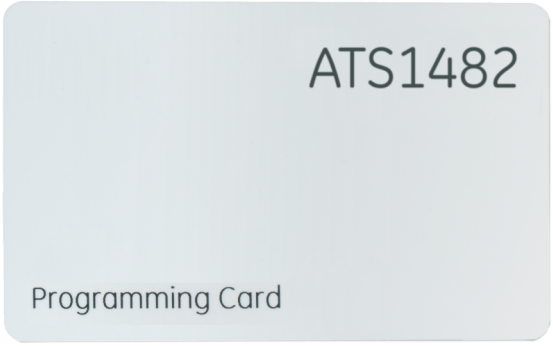

Details

- Instructions on flip side of the card

ATS1482

ATS Reader Address Configuration Card for ATS1160/61 Mifare Readers

Technische specificaties

System

Custom data model	No
Supported readers	ATS ATS118x Secure Readers, ATS1160/1161 Mifare Readers

Technology

Credential type	Configuration card, Proximity
Credential operating frequency	13.56 MHz

Printing

Direct surface printing	Yes

Ordering information

Minimum order quantity	1
Cards/tags in package	1

Physical

Material	PVC
Form factor	CR80 (Credit)
Colour	White
Card Label	Programming Card

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57