# SMA-LP-MULTI

**MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE**



# SMA-LP-MULTI

## MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

## Technische specificaties

### System

| | |
|---|---|
| RTE (Request To Exit) | No |
| CSN (Card Serial Number) | Yes |
| Custom data model | Yes |

### Technology

| | |
|---|---|
| Reader type | Biométrico |
| Reader operating-transmitting frequency | 13,56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN), MIFARE Classic (datos personalizados), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (datos personalizados), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, niveles 1 y 3), NFC (CSN) |
| SAM module embedded | No |

### Biometric

| | |
|---|---|
| Biometric type | Huella digital |
| Biometric sensor type | Óptica |

### Interface & connections

| | |
|---|---|
| Interface | Ethernet, OSDP V2, OSDP V2 Secure Channel, RS-485, USB, Wiegand |
| Connector type | Netværk, Svinesvans |

### Tamper type

| | |
|---|---|
| Pry-off tamper | No |
| Opening tamper | Yes |

### Operation

| | |
|---|---|
| Stand-alone | Yes |
| PIN keypad | Yes |

### Electrical

| | |
|---|---|
| Power supply type | PoE ind |

### Physical

| | |
|---|---|
| Colour | Sort |
| Material | Polycarbonat |
| Form factor | Overdimensioneret |
| Mounting type | Montaje en Superficie |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Environment | Udendørs |

### Regulatory

| | |
|---|---|
| Compliancy | CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE |

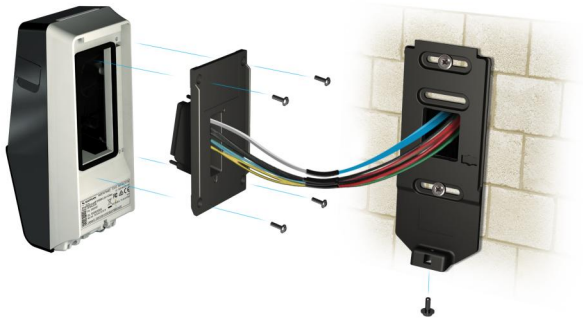

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57