# 2010-2A-ZI-24-S

**Addressable fire panel component, LED indicator, 24 zones**

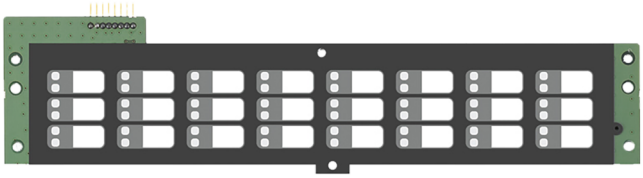

## Details

- Addressable fire panel component, LED indicator, 24 zone
- Suitable for small panel 2X-A and ZP2-A series

# 2010-2A-ZI-24-S

## Addressable fire panel component, LED indicator, 24 zones

## Technical specifications

### Zone

| | |
|---|---|
| Maximum zone capacity | jusqu'à 24 |

### Physical

| | |
|---|---|
| Form factor | Lille |
| Physical dimensions | 190 x 60 x 320 mm (W x H x D) |
| Net weight | 55 g |
| Shipping weight | 200 g |
| Mounting type | I kabinettet |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-2, EN54-4 |

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 14 October 2026 - 16:28