
# ATS1238

## Wireless DGP supporting 868Gen2 sensors and PIRCam

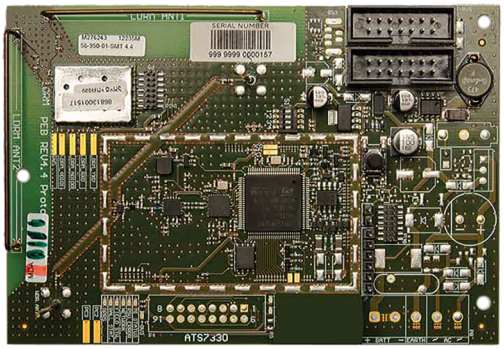


## Details

- Expands the Advisor Advanced panel with 32 wireless zones, including PIR Cameras
- Uses the KGS Security "Learn Mode" 868MHz Wireless Transmitter Sensors
- Installed into the Large Poly housing
- Features spatial diversity to minimize wireless signal nulls or dead spots and has a nominal open-air receiving range of 460m
- If dead spots need to be eliminated a KGS Fire & Security 868MHz repeater may be used for 868Gen2 sensors
- Powered from MI bus interface of the Advisor Advanced
- Up to 16 Fob buttons may be programmed for users to arm and disarm or to control relays

# ATS1238

## Wireless DGP supporting 868Gen2 sensors and PIRCam

## Technische specificaties

### General

| | |
|---|---|
| Expander type | Trådløs udvidelse |
| Product line | Advisor Advanced, Axon |
| Connection type | Databus connection |

### System

| | |
|---|---|
| Addressing | Dip-Schalter |

### Wireless

| | |
|---|---|
| Operating frequency | 2.4 GHz, 868 MHz AM |
| Wireless open-air range | 400 m |

### Electrical

| | |
|---|---|
| Power supply type | 12 VDC |
| Integrated power supply | No |

### Environmental

| | |
|---|---|
| Environment | EN50130-5 ; Klasse II - Binnen (algemeen) |

### Regulatory

| | |
|---|---|
| Compliancy | CE |
| Certification | CE, EN50131 Grad 2, INCERT |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57