
# ACL800SUW-BCMF-S

**ACL800 Biometric Capacitive with MIFARE reader - Fingerprint, Wiegand, Surface mount, 9500 Templates, Silver**

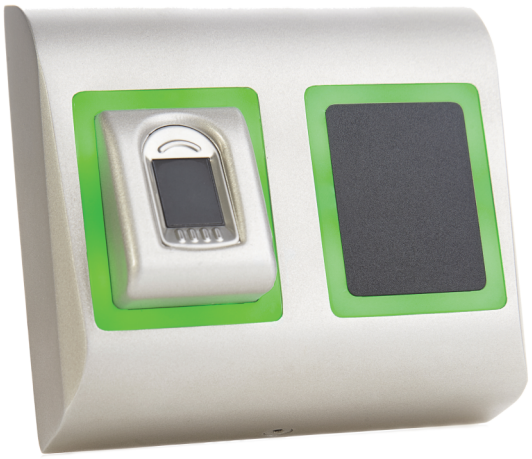

# ACL800SUW-BCMF-S

## ACL800 Biometric Capacitive with MIFARE reader - Fingerprint, Wiegand, Surface mount, 9500 Templates, Silver

## Technische Spezifikationen

### System

| | |
|---|---|
| RTE (Request To Exit) | No |
| CSN (Card Serial Number) | Yes |
| Custom data model | No |

### Technology

| | |
|---|---|
| Reader type | BioMetric, Smart Card |
| Reader operating-transmitting frequency | 13.56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE UltraLight (CSN) |
| Mifare type | ISO14443A |
| No. of Mifare bytes CSN | 4 Bytes (S50), 7 Bytes (S70) |
| Read write | No |
| SAM module embedded | No |

### Biometric

| | |
|---|---|
| Biometric type | Fingerprint |
| Biometric sensor type | Capacitive |

### Interface & connections

| | |
|---|---|
| Interface | Wiegand |
| Connector type | Pigtail |

### Tamper type

| | |
|---|---|
| Pry-off tamper | No |
| Opening tamper | Yes |

### Operation

| | |
|---|---|
| Stand-alone | No |
| PIN keypad | No |

### Electrical

| | |
|---|---|
| Power supply type | VDC |

### Physical

| | |
|---|---|
| Colour | Silver |
| Material | Moulded aluminium |
| Form factor | Oversized |
| Mounting type | Surface mount |

### Environmental

| | |
|---|---|
| Environment | Indoor, Outdoor |

### Regulatory

| | |
|---|---|
| Compliancy | CE, RoHS |

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.