1X-F2-SC-05

Conventional Fire Panel with Scandinavian Key - 2 Zone

Généralités

La centrale

Options

Approvals & Compliance



1X-F2-SC-05

Conventional Fire Panel with Scandinavian Key - 2 Zone

Spécifications techniques

General

Maximum system capacity (device count)	bis zu 1280
Network size (nodes)	bis zu 32

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	bis zu 2

Input

Input quantity	2

Physical

Form factor	Klein
Colour	Grau (RAL 7035)
Mounting type	Oberflächenmontage

Environmental

Environment	Drinnen

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-4

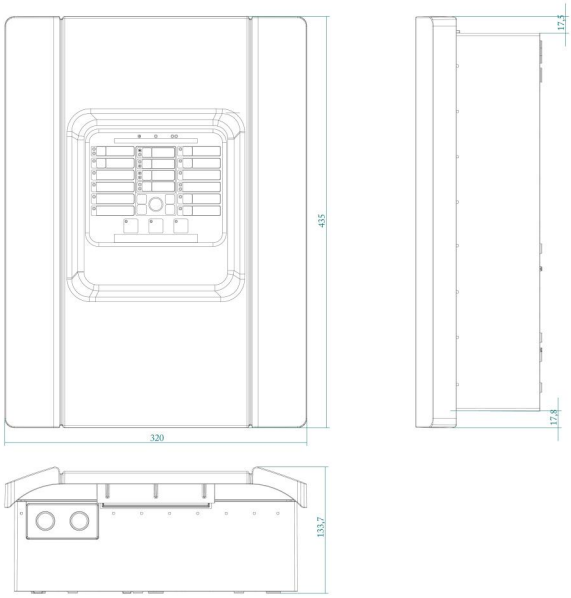

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57